


FLEXIBLE WEDGE CLAMP

Product Details

- Service Wedge Clamps are used for low-tension dead-ending of ACSR, AAAC, and Aluminum Conductors.
- Wedge Clamps shells have a pre-applied gritted electrical joint compound to strengthen hold on conductor.
- Allied Bolt Flexible Wedge Clamps feature an eyelet to choke cable, allowing cable to pass through tight dead ends.
- All Wedge Clamps are formed from high-strength T2024 Aluminum.
- Bail wire is 12" long and is fabricated from flexible black nylon jacket galvanized aircraft strand (7x7 class).

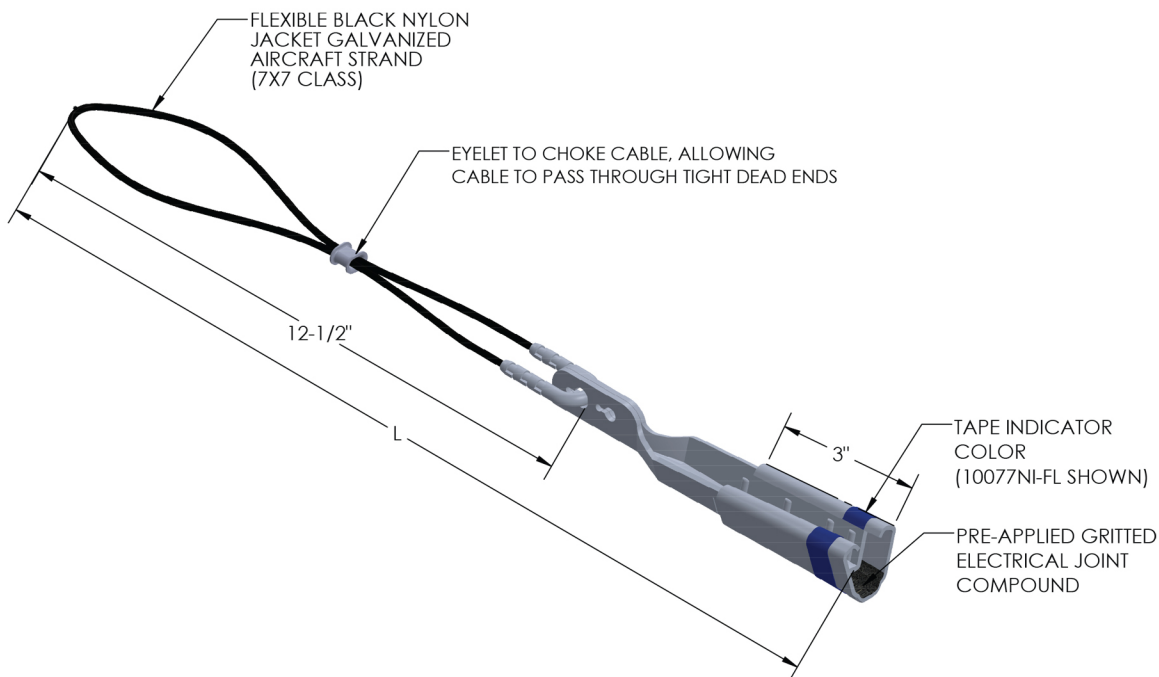

Specifications

		CONDUCTOR SIZE							
Part #	Description	ACSR AAAC	ALU CONDUCTOR	DIA. RANGE	ULTIMATE STRENGTH	TAPE INDICATOR COLOR	L	WEDGE AND SHELL MATERIAL	BAIL MATERIAL
10076NI-FL	Small (#2-6) Flexible Wedge Clamp	2-6	1 STR-6 SOL	.160"-.330"	1100 LBS.	ORANGE	18"	T2024 Alimunnnum	Nylon Jacket Galvanized Aircraft Standard
10077NI-FL	Medium (1/0-#4) Flexible Wedge Clamp	4-1/0	2/0 STR-2 SOL	.230"-.420"	1200 LBS.	BLUE	18-3/4"		
10078NI-FL	Large (4/0-2/0) Flexible Wedge Clamp	4/0-2/0	4/0 STR-2/0 SOL	.400"-.563"	1600 LBS.	RED	19"		



For technical assistance, sample, or quote
Please call us at (516)512-7600 or email us at orders@alliedboltinc.com

Fax: (516)512-7611 www.alliedboltinc.com