




**#74244**

- Used under the head of bolts and nuts to provide a broader bearing surface and to increase the compression of a tightened nut.
- Washers are thermally Diffused Galvanized per ASTM Specification A1059 and then treated with a silicate based top-coat.
- Bolt and nut are thermal diffused galvanized using Greenkote's™ process to withstand 3,000 hours of Salt Spray per ASTM Specification B117.
- Thermally Diffused Galvanized per ASTM Specification A1059 and then treated with a silicate based top-coat.

74244	3" X 3" CURVED WASHER - TDG WITH 13/16" HOLE (1/4" THICK)	50	1	30
-------	--	----	---	----

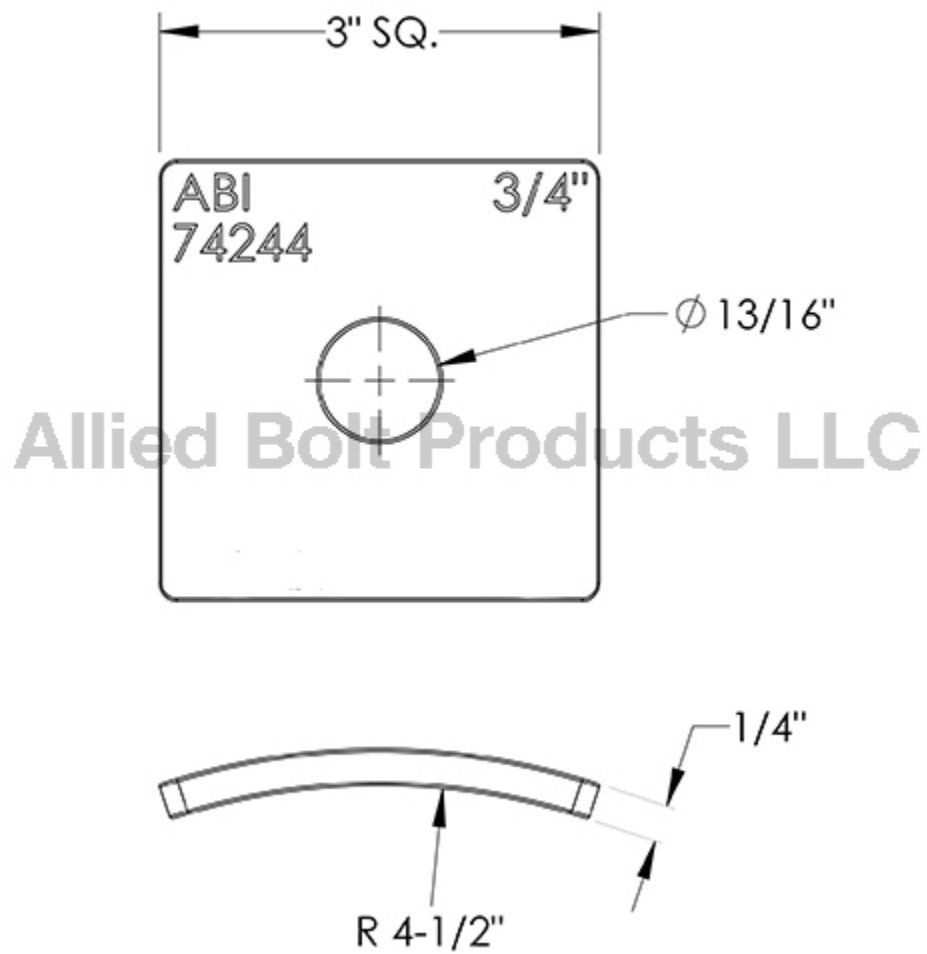

December 15, 2025