




#74501

- Used under the head of bolts and nuts to provide a broader bearing surface and to increase the compression of a tightened nut.
- Washers are thermally Diffused Galvanized per ASTM Specification A1059 and then treated with a silicate based top-coat.
- Bolt and nut are thermal diffused galvanized using Greenkote's™ process to withstand 3,000 hours of Salt Spray per ASTM Specification B117.
- Thermally Diffused Galvanized per ASTM Specification A1059 and then treated with a silicate based top-coat.

74501	1/8" X 2" SQUARE WASHER FOR 5/8"	100	2	48
	BOLT - TDG			

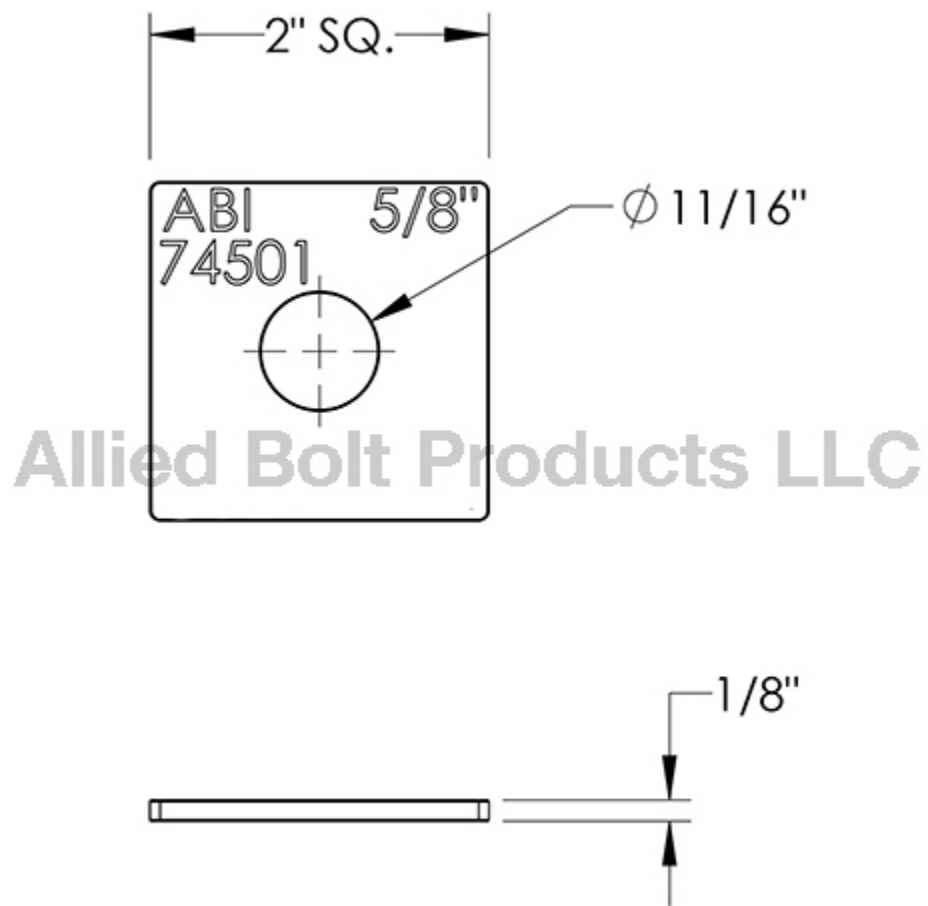

December 14, 2025